

MOTOMAN GP88

Handling & General Applications
with the GP Series





The MOTOMAN GP88 is a versatile high speed 6-axis robot, providing a high payload of up to 88 kg. It offers superior performance in material handling, machine tending, processing and dispensing applications.

Despite its slim body, the MOTOMAN GP88 features a wide work envelope with a small interference radius. Thereby it can be placed close to machines for loading and unloading of parts, which reduces the required floor space to a minimum.


KEY BENEFITS

- Flexible and powerful (payload of 88 kg)
- High axis speeds
- Improved wrist ratings provide higher handling capacity
- Small interference radius reduces floor space requirements

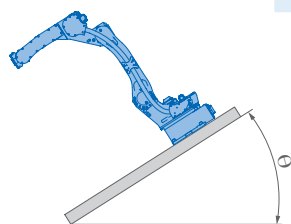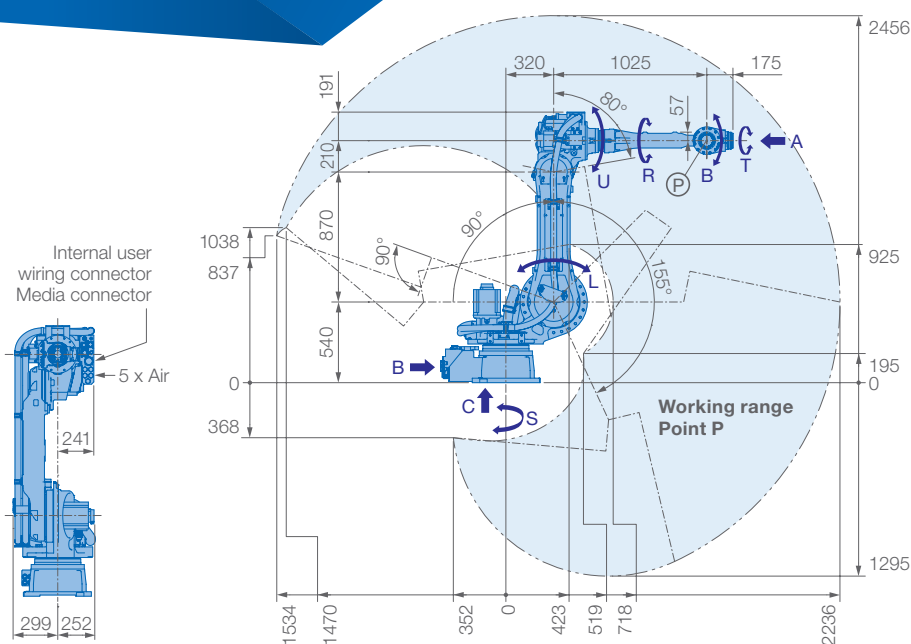


Robot installation angle θ [deg.]	S-axis operating range [deg.]
$0 \leq \theta \leq 30$	± 180 (Standard)
$30 < \theta \leq 35$	± 60
$35 < \theta \leq 45$	± 45
$45 < \theta$	± 30


Allowable wrist load

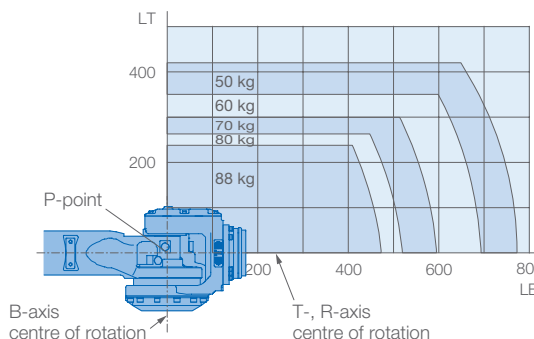


View A

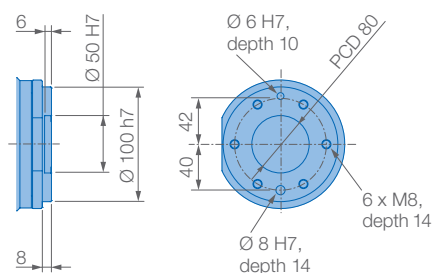

View B

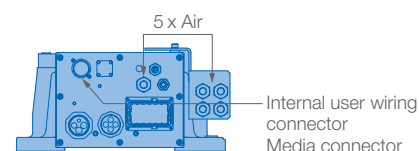

View C

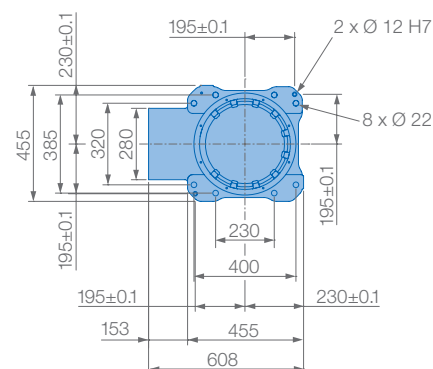

Mounting options: Floor, ceiling, wall, tilt*

Protection class version YR-1-06VX88-D00:
Main axes (S, L, U) IP65, wrist IP67

Please notice: Just valid for body/wrist,
connector base not protected

* tilt with condition of angle – see table left side

Specifications GP88

Axes	Maximum motion range [°]	Maximum speed [°/sec.]	Allowable moment [Nm]	Allowable moment of inertia [kg · m ²]	Controlled axes	6
S	± 180	170	–	–	Max. payload [kg]	88
L	$+155/-90$	140	–	–	Repeatability [mm]	± 0.03
U	$+90/-80$	160	–	–	Max. working range R [mm]	2236
R	± 360	230	408	30	Temperature [°C]	0 to +45
B	± 125	230	408	30	Humidity [%]	20 – 80
T	± 360	350	206	11	Weight [kg]	630
					Power supply, average [KVA]	4.0

Robotics Division

YASKAWA Europe GmbH
Yaskawastraße 1
85391 Allershausen, Germany
Tel. +49 (0) 8166/90-0
Fax +49 (0) 8166/90-103
robotics@yaskawa.eu
www.yaskawa.eu

YASKAWA Headquarters Academy and Sales Office

YASKAWA Europe GmbH
Philipp-Reis-Straße 6
65795 Hattersheim am Main,
Germany
Tel. +49 (0) 6196/77725-0
Fax +49 (0) 6196/77725-39

All drawing dimensions in mm. Technical data may be subject to change without previous notice. Please request detailed drawings at robotics@yaskawa.eu.

YR-1-06VX88-D00 · D-02-2026, A-No. 195936



YASKAWA